

AP-MNT-CM1 Mounting Kit Installation Guide

Introduction

The AP-MNT-CM1 mounting kit offers a simple and secure solution for mounting an access points to a ceiling tile rail.

Package Contents


- Ceiling rail bracket (x2)
- Mounting plate
- M3 Screw
- *AP-MNT-CM1 Mounting Kit Installation Guide*

Installation

Refer to the steps below to install the AP-MNT-CM1 Mounting Kit.

1. Remove the ceiling tiles on either side of the rail where the AP-MNT-CM1 will be mounted.
2. Insert the mounting plate into the ceiling rail brackets by pressing the brackets into the shallow slots located on the sides of the mounting plate. See [Figure 1](#). Leave enough space between the brackets so that the ceiling rail can fit between the brackets.

Figure 1 *Attaching the ceiling rail brackets to the mounting plate*

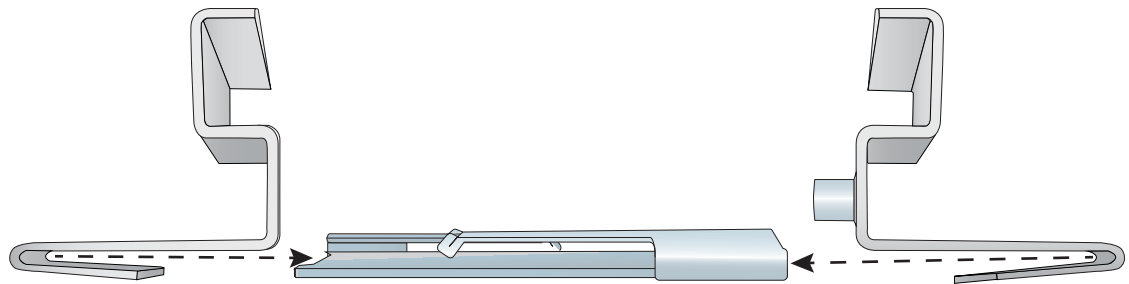


3. Position the ceiling rail between the brackets so that the rail rests flat between the brackets once they are pushed together. Insert the M3 screw into the side of the mount and tighten until the brackets are fastened securely around the rail. See [Figure 2](#).
For additional stability, use pliers to bend the metal tabs on the sides of the bracket inwards.




0511928-02

Figure 2 Attaching the AP-MNT-CM1 to a ceiling rail

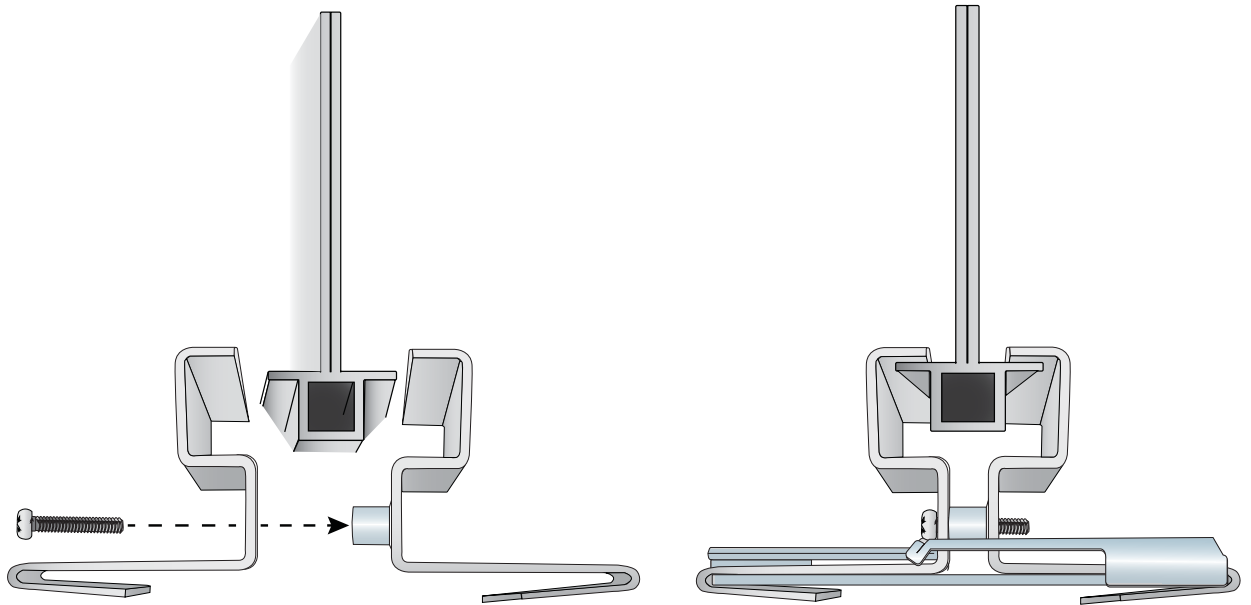

4. Position the access point at a 30 degree angle to align the two pins on the back of the device with the corresponding slots on the AP-MNT-CM1 mount. Press the access point into the mount, then rotate the device clockwise until both pins lock into the mount. See [Figure 3](#).

Figure 3 Securing the AP to the AP-MNT-CM1

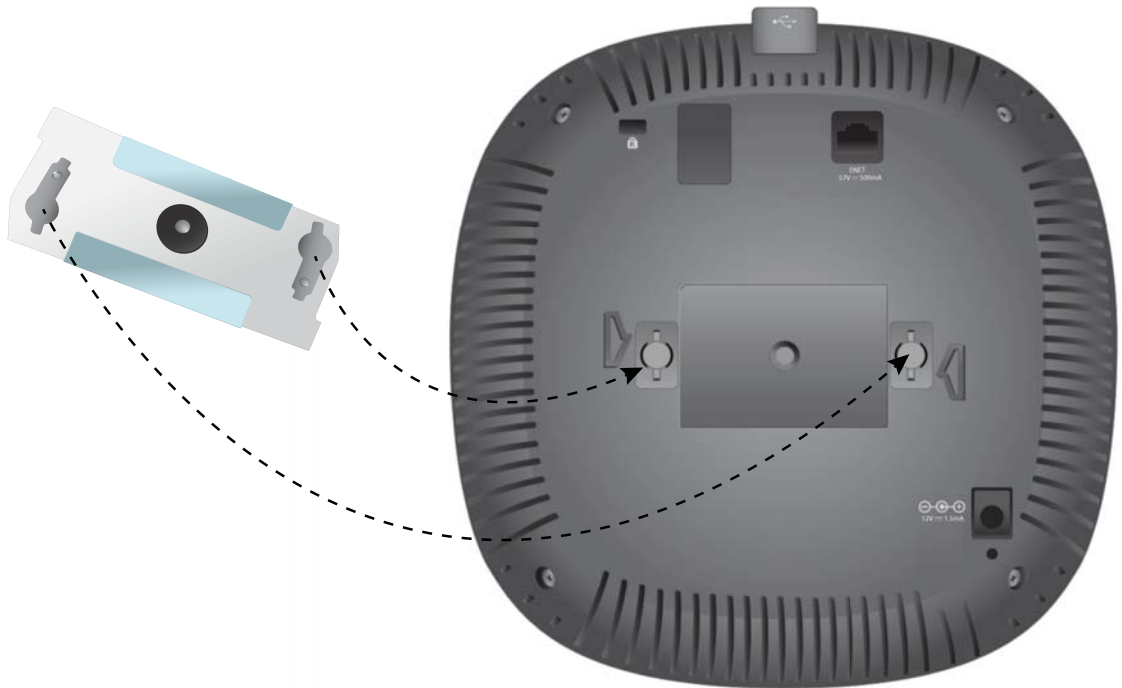

5. Route any cables the back of the access point, and return the ceiling tiles to their original position.



Improper installation of the AP-MNT-CM1 mounting kit may result in damage to equipment and/or bodily injury.